



# **Ezserver Qucik Guide**

*Signage Version*

[www.ezhometech.com](http://www.ezhometech.com)

Updated :07/29/2017

Version : 1.0.001

## **Content**

<b>1.</b>	<b>Installation.....</b>	<b>3</b>
<b>2.</b>	<b>Digital Signage Panel .....</b>	<b>4</b>
<b>3.</b>	<b>Add New Layout .....</b>	<b>6</b>
<b>4.</b>	<b>Administrator password change .....</b>	<b>7</b>
<b>5.</b>	<b>Digital Signage Player Requirement .....</b>	<b>8</b>
<b>6.</b>	<b>Digital Signage Player Setting.....</b>	<b>8</b>

## 1. Installation

**ezserver\_signage.zip** contains a folder “**ezserver\_signage**” that includes ezserver image, system configuration.

- o unzip **ezserver\_signage.zip**
- o enter **ezserver\_signage** folder
- o double click **Ezserver12.exe**
- o send **serial\_number.txt** to [sales@ezhometech.com](mailto:sales@ezhometech.com) for license activation.
- o click **Action: Open Panel** to open Ezserver Digital Signage panel in a browser.



There are two ways to shutdown ezserver

- Select Action:Shutdown
- Login Ezserver System Management

## 2. Digital Signage Panel

Digital Signage Panel is based on Ezserver API to provide managements for administrators, It supports Internet browser such as *Internet Explore, Chrome, Firefox* or *Safari* to login by the below URL path

[http://Server\\_IP:18000/admin/index.htm](http://Server_IP:18000/admin/index.htm)

**Ezserver**

- HOME
- USER
- GROUP**
- LAYOUT
- PLAYER
- CHANNEL
- MOVIE
- ALERT
- BLACKLIST
- SETTING
- STATISTICS
- LOG
- SHUTDOWN

**System Information**

- \* ezhometech EZserver
- \* Version: **Signage 2.0(07/29/17)**
- \* Serial Number: 0ACA80D3AEDF9A53B5C846C5C61F5
- \* Start at: 2017/1/13 18:55:35
- \* Uptime: 0 Days 0:01:12
- \* Groups: 2
- \* Subscribers: 19
- \* Streaming Connections: 1
- \* Blacklist IP: 0
- \* Channels: 30
- \* Active Channels: 30
- \* Movies: 30
- \* Upload Bandwidth: 1.57 Mbps
- \* Download Bandwidth: 0.83 Mbps

Digital Signage Panel provides the below management

- **Home:** System Information.
- **User:** Subscriber Management
- **Group:** Group Management
- **Layout:** Screen Layout Generation.
- **Player:** Online Player Information
- **Channel:** Channel Management
- **Movie:** Movie Management
- **Alert Player:** Alert Player Information
- **Blacklist:** Automatic blacklist management
- **Setting:** Protocol port setting
- **Statistics:** Channel Statistics

- **Shutdown:** Shutdown Ezserver
- **Log:** System Log

## 3. Add New Layout

Follow the below steps to add new layout.

**Step1: Click “Layout” Button.**


**Step2: Click “<” or “>” Button to select one of screen layout.**

**Step3: Select resolution and video width and height.**

**Step4: press “Create layout” button**



**Step5: Add new video, image in Displayed windows.**

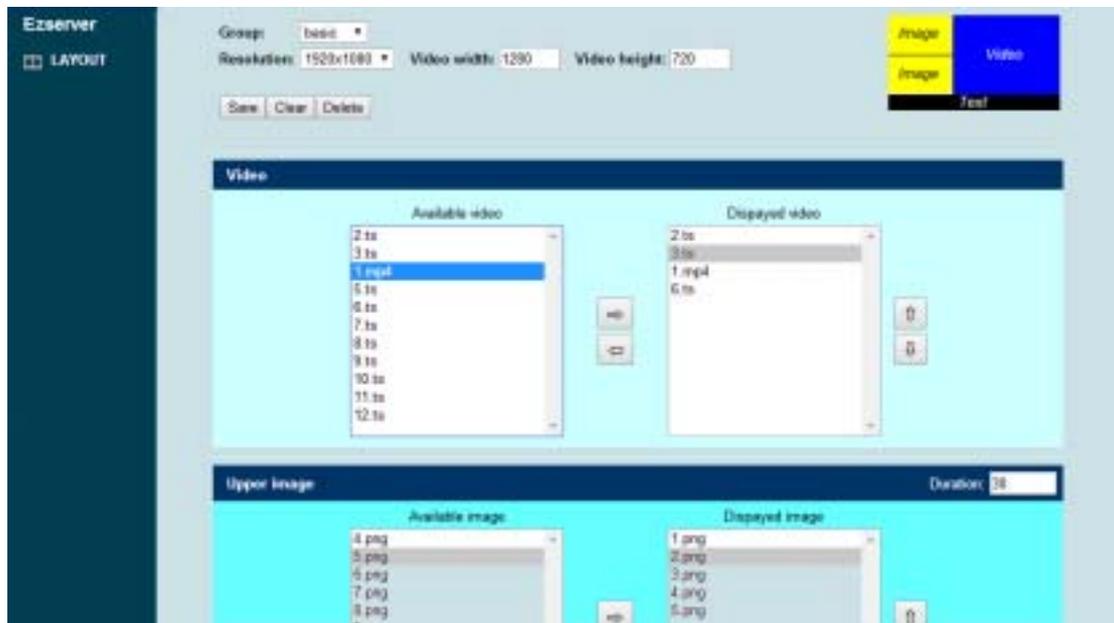

## 4. Administrator password change

Use Internet browser such as *Internet Explore, Chrome, Firefox* or *Safari* to enter System Management by the URL path : **http://Server\_IP:18000/admin/index.htm**

Login Panel by user id "**root**" and password, then click **User button** to change root password.

## 5. Digital Signage Player Requirement

### Software Requirement


Items	Version
EZserver Digital Signage Panel	Release 2.0
Google Android	Above 4.x, 5.x, 6.x

### Hardware Requirement

Items	Specification
Processor	Above 1.0GHz
Memory	At least 1GB for 200 channels
Network Interface	802.11 a/b/g/n
Disk Space	248K bytes

## 6. Digital Signage Player Setting

When you start Digital Signage Player first time, you have to input EZserver Information into the Setting. The Setting includes User Name, Password, EZserver Domain Name / IP and Port No. as below:

**Signage Player**

<b>User Name :</b>	<u>test</u>
<b>Password :</b>	<u>****</u>
<b>EZserver IP :</b>	<u>192.168.0.10</u>
<b>Port No. :</b>	<u>1700</u>

<input type="button" value="Save"/>	<input type="button" value="Cancel"/>
-------------------------------------	---------------------------------------

[www.ezhometech.com](http://www.ezhometech.com)