


MAG STB

There are two ways to play channels or movies from Ezserver.


Ezserver portal method:

Add a user with password in Ezserver Panel first:

- Add a user by MAC Address and Serial Number in Ezserver User Panel. Take care the case sensitivity of MAC ID from MAG box with User Name of Ezserver Panel.

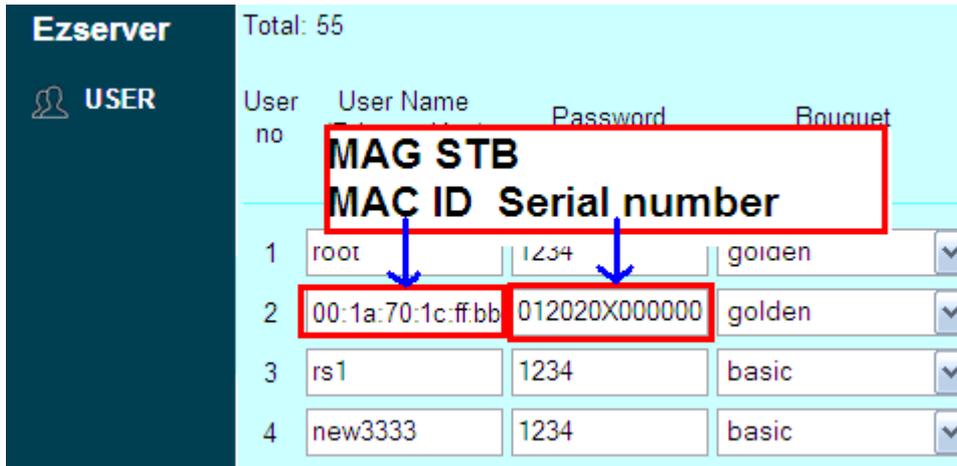

- If you see the below screen, it means the Username of Ezserver Panel and MAC ID from Mag box are not same for the case sensitivity.

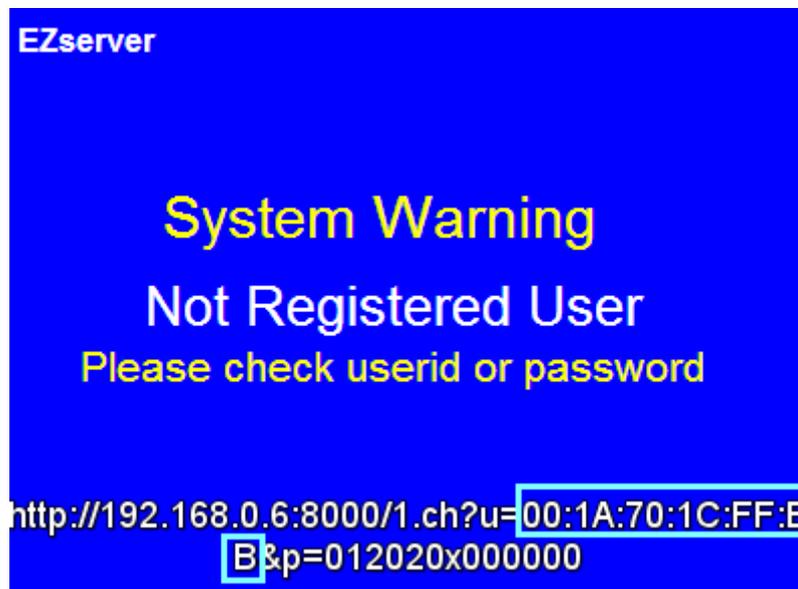


Ex. The MAC ID of MAG stb is 00:1A:70:1C:FF:BB, the username is defined by 00:1a:70:1c:ff:bb, so change username to 00:1A:70:1C:FF:BB.

Add **Ezserver portal** into Magxxx STB by the URL:

Syntax: `http://serverip:api_port/mag/index.hmt`

Ex. : `http://192.168.0.10:17000/mag/index.htm`

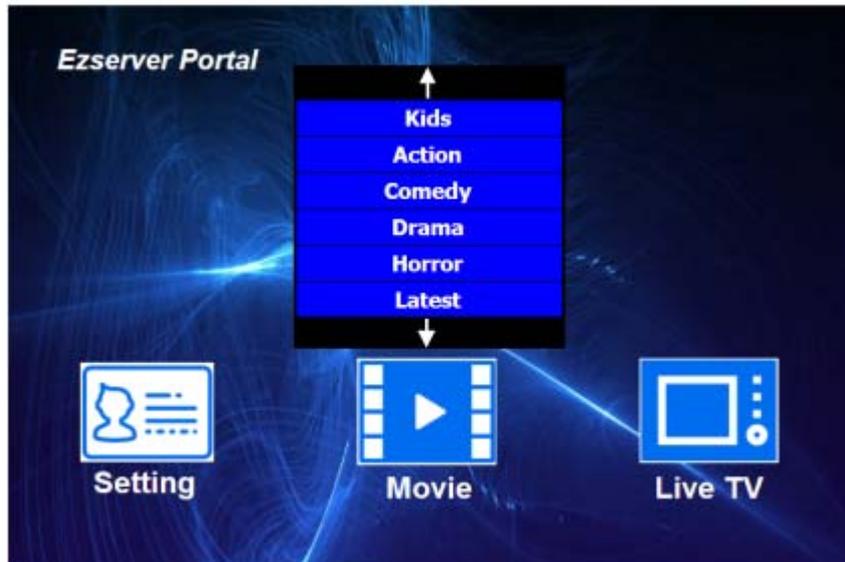

M3U download method:

Download m3u channel list from IPTV Panel and copy it to MAG stb as below:

- **Select m3u of CH List filed in User panel to download it to your PC.**
- **Copy the m3u file into a USB and insert it to MAG stb**
- **Open MAG stb and go to “Home Media”**
- **Select the m3u file in the USB**
- **Press F3 to save all links into MAG stb**
- **Go to IPTV channels to play all links**

The screenshot shows the Ezserver IPTV management interface. On the left is a dark sidebar with the 'Ezserver' logo and a 'USER' section. The main area displays a table of users with columns for 'User no', 'User Name (Primary Key)', 'Password', and 'Group'. A 'Total: 141' indicator is at the top left. To the right of the table is a 'CH List' dropdown menu, which is currently open and shows a list of channel list options. The 'm3u' option is highlighted in blue. A blue callout box with white text 'select m3u option' is overlaid on the table, pointing to the 'm3u' option in the dropdown.

User no	User Name (Primary Key)	Password	Group	CH List
1	root	1234	golden	--
2	robert	1234	basic	--
3	5586688948	5586688948	basic	Enigma
4	8698527291	8698527291	basic	Enigma 1.6
5	4395840282	4395840282	basic	Enigma(RTMP)
6	8789290532	8789290532	basic	Enigma 1.6(RTMP)
7	7265082124	7265082124	basic	Enigma(chno)
8	8509419732			Enigma 1.6(chno)
9	9817122342			Enigma(RTMP/chno)
10	6428111621			Enigma 1.6(RTMP/chno)
11	4653669740	4653669740	basic	m3u
12	9006398696	9006398696	basic	m3u(MPEG TS)
13	4707250525	4707250525	basic	m3u(FLV)
14	9292189360	9292189360	basic	m3u(chno)
15	3845085616	3845085616	basic	m3u(chno with suffix)
				m3u(chname with suffix)
				m3u(RTMP)
				m3u8
				octagon
				ariva
				XBMC